


Fusible Chip Resistors

FCR Series

- Fuses safely under defined overload conditions
- Combines inrush limit and board-level protection
- Standard chip formats for fast placement
- RoHS compliant matt tin finish

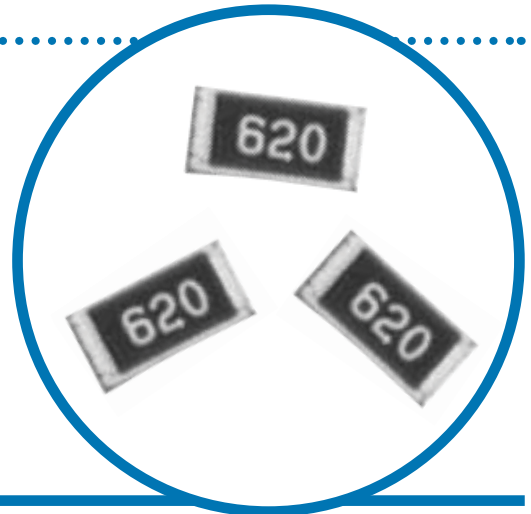

Electrical Data

		0603	0805	1206	1210	2010
Power rating @ 70°C	watts	0.063	0.1	0.125	0.25	0.5
Resistance range	ohms	5R6 – 33R	10 – 82R		10 – 300R	10 – 100R
Minimum power for <60s fusing time	watts	2	2.5		10–27R: 3.75 30–300R: 3.0	4.5
Maximum post-fuse standoff (dc or ac peak)	volts	25	50		100	
TCR	ppm/°C					±500
Resistance tolerance	%					±5
Ambient temperature range	°C					-55 to +125
Standard values						E24

Physical Data

Dimensions (mm) and weight (g)						
	L	W	C	A	T max	
0603	1.6±0.15	0.8±0.2	0.25±0.2	0.25±0.2	0.65	
0805	2.0±0.2	1.25±0.2	0.4±0.2	0.4±0.2	0.65	
1206	3.2±0.15	1.6±0.15	0.5±0.2	0.5±0.2	0.70	
1210	3.2±0.15	2.6±0.15	0.5±0.2	0.5±0.2	0.70	
2010	5.0±0.15	2.5±0.2	0.6±0.25	0.6±0.25	0.71	

Construction

Conductors, resistive element and protection are applied to a 96% alumina substrate. The design and laser adjustment of the resistive element optimises the fusing performance of the resistor.

Terminations

The chips are supplied with wrap-around terminations suitable for soldering.

Solderability

The terminations have an electroplated nickel barrier and 100% matt tin finish. This ensures excellent 'leach' resistance properties and solderability.

Marking

The body protection is resistant to all normal cleaning solvents suitable for printed circuits. All resistors are individually marked with 3 digits. The first two digits are the significant figures and the third defines the number of added zeros.


General Note

TT electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT electronics' own data and is considered accurate at time of going to print.

Performance Data

		Maximum	Typical
Load at rated power: 1000 hours cyclic load @ 70°C	ΔR%	1	0.1
Shelf life test: 12 months at room temperature	ΔR%	0.2	0.1
Derating from rated power at 70°C		Zero at 125°C	
Short term overload: 10 cycles of 6.25 x rated power for 5S	ΔR%	2.5	0.1
Climatic category		55/125/56	
Long term damp heat 56 days 85°C 85%RH	ΔR%	3	0.5
Temperature rapid change -55 to 125°C	ΔR%	1	0.1
Resistance to solder heat	ΔR%	2.5	1
Post-fuse leakage: 50Vdc (25Vdc for 0603)	mA	10	2
Voltage proof	volts	400	
Insulation resistance @ 100Vdc	ohms	>100M	

Fusing Performance

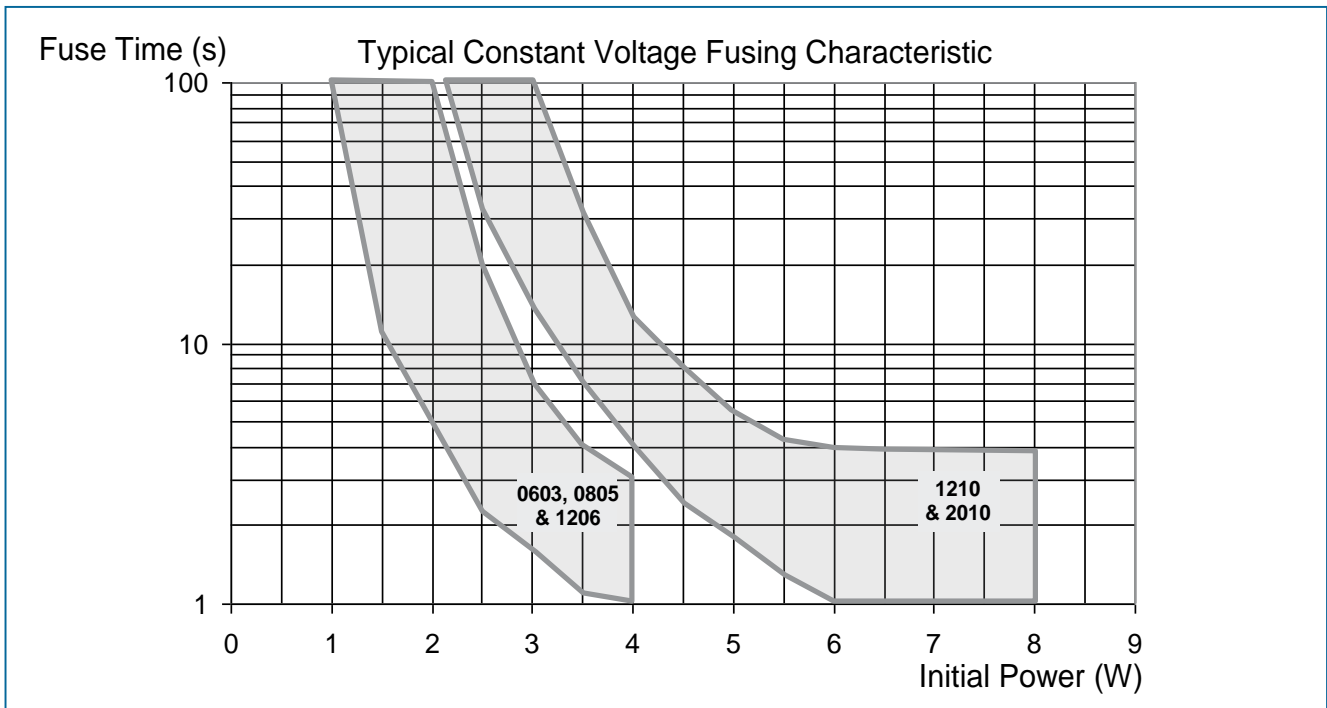

Note – actual fusing characteristics depend on mounting conditions. Reference conditions are FR4 substrate with 35 μm (1oz) copper, pad and track width as follows: 0603 – 1.5mm, 0805 – 1.7mm, 1206 – 2mm, 1210 – 2.9mm, 2010 – 3mm.

Packaging


FCR Resistors are supplied taped and reeled on a 7" reel as per IEC 286-3. The width of the reel is 15.4±1mm for 2010 size and 11.4±1.1mm for the smaller sizes.

General Note

TT electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT electronics' own data and is considered accurate at time of going to print.

Ordering Procedure

Example: FCR1210 at 22 ohms and 5% tolerance on a reel of 5000 pieces -

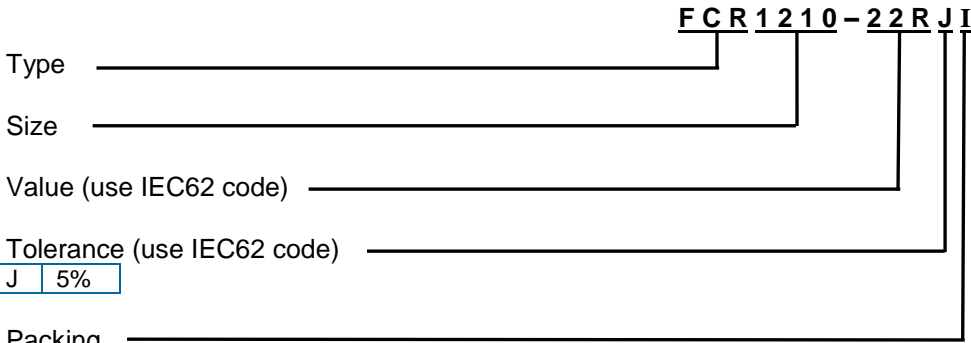

J	5%
---	----

Packing				
I	Tape	0603, 0805, 1206, 1210	5000/reel	Standard
		2010	4000/reel	

General Note

TT electronics reserves the right to make changes in product specification without notice or liability.
All information is subject to TT electronics' own data and is considered accurate at time of going to print.



www.bitechnologies.com www.irctt.com www.welwyn-tt.com